



**BEST WEIGHT TO POWER RATIO IN THE WORLD**



# CP SERIES CP300D

Constant Potential Portable X-Ray Generators



endsa.com



**Ensayos No Destructivos S.A. de C.V.**

EQUIPOS, ACCESORIOS Y CALIBRACIONES



**TELEDYNE ICM**  
Everywhereyoulook™

Part of the Teledyne Imaging Group

## Your inspection becomes a walk in the park



LIGHT-WEIGHT



100% DUTY CYCLE



CONSTANT  
POTENTIAL



MULTIPLE-OUTPUTS  
CAROUSEL



RUGGEDIZED



WIDE INPUT  
POWER RANGE

### FEATURES

	Unit	SITEX CP300D
Beam	-	Directional
Power supply	-	Mains
Output voltage range	kV	20 to 300
Tube current range	mA	1 to 10
Tube current at full output	mA	3
Maximum power at the anode	W	900
Constant power mode	-	Yes
Working cycle at 30°C (*)	%	100
Steel penetration (**)	mm/in	66 / 2.6
Weight	Kg/lbs	26 / 57.32
Overall dimensions	mm/in	Ø 180 x 839 / 7.1 x 33
Leakage dose at 1 m at full output	mSv/h	< 5.0
Optical focal spot according to EN 12543	mm/in	3.0 / 0.12
Maximum useful angle	°	60 x 40 elliptical
Inherent filtration	mm/in	0.8 / 0.03 (Be window)
Protection class	-	IP65
Operating temperature	°C/F°	-30 to +60 / -22 to +140
Storage temperature	°C/F°	-40 to +70 / -40 to +158


(\*) Open air - airstream 5m/sec.

(\*\*) 700 mm FFD, 10 min., AA400, D=2 for CPD

### POWERBOX

	Unit	POWERBOX
Adjustable pre-warming time	sec	5 to 255
Pilote light indicator	-	3
Independent START and STOP	-	Yes
Two-position safety key rotary switch	-	X-ray ON / STANDBY
Preheating is function of selected kV (kV max by default)	-	Automatic
Exposure time calculator	-	Optional
Programmable safety interlocks	-	3
Clear indication of the precise carousel system position	-	Yes
Type of power supply	-	Mains, Power generator, Battery (option)
Supply voltage range	VAC	From 90 to 264
Supply frequency range	Hz	From 45 to 66
Input power factor when at full output	%	99
Input current at full power, 230 VAC	A	6.0
Storage temperature	°C/F°	-40 to +70 / -40 to 158
Operating temperature	°C/F°	-30 to +55 / -22 to 131
Protection class	-	IP65
Weight	Kg/lbs	7.9 / 17.4


### CP SERIES BUILD-IN CAROUSEL | 5 OUTPUT POSITIONS

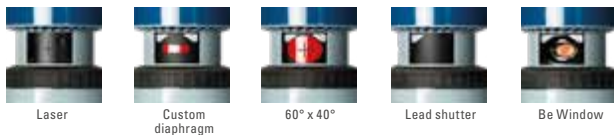

### ACCESSORIES

Quadripod	Transport case
Holding bars	Flashing light
Tripod	Diaphragms
Pipe slider	Reinforced cable
Alucase	Tripod flashing light
Battery converter	

### DRAWINGS

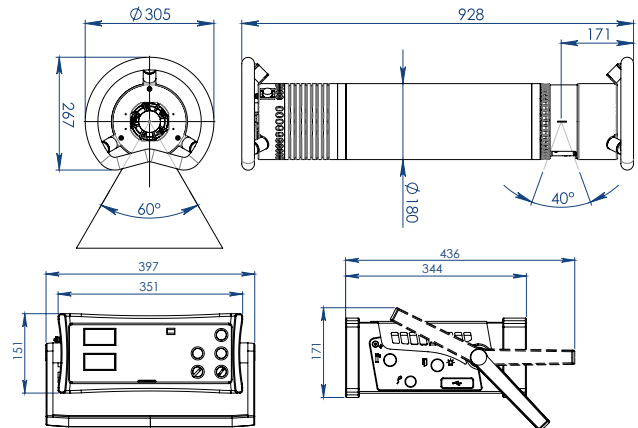

#### CDMX

Av. 517 No. 80, Col San Juan de Aragón 1a Sección, C.P. 07969, Alc. Gustavo A. Madero, México, CDMX.

(55) 5751 3787  
(55) 5751 3767

#### Apodaca N.L.

Olimpia 1424 B Col. Nueva Lindavista, N.L. CP 67129

(81) 13672397  
(81) 13574285



**TELEDYNE ICM**  
Everywhereyoulook™

Part of the Teledyne Imaging Group