


▶ THE FUTURE IS NOW



GO-SCAN 2329

Portable Digital Radiography Detector

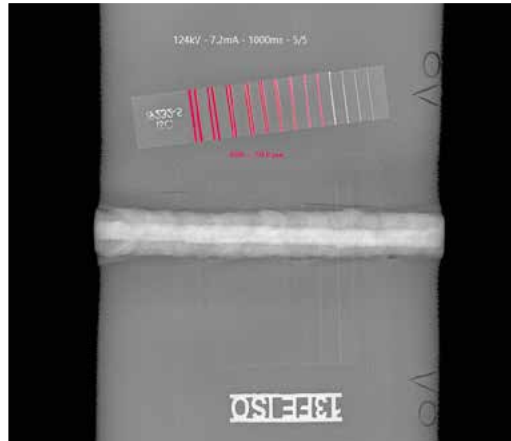

endsa.com



Ensayos No Destructivos S.A. de C.V.
EQUIPOS, ACCESORIOS Y CALIBRACIONES



TELEDYNE ICM
Everywhere you look™

Part of the Teledyne Imaging Group

Enter into the new world of digital inspection



CABLE




CMOS TECHNOLOGY




PLUG & PLAY



RUGGEDIZED



STATE-OF-THE-ART IMAGE EDITING SOFTWARE



FULLY INTEGRATED

FEATURES

Unit

GO-SCAN 2329

GENERAL

Technology	-	CMOS Active Pixel
Pixel pitch	µm	49.5
Active area	mm/in	230 x 290 / 9 x 11.4
Active resolution	pxl	4608 x 5890

BANDWIDTH

Data interface	-	GigE
ADC conversion	bits	14
Frame rate- 1x1 (GigE)	fps	up to 2

POWER CONSUMPTION

Power supply	-	Mains*
Power consumption	W	15 to 40

INTEGRATION

Dimension (without sleeve)	mm/in	331 x 331 x 23 / 13 x 13 x 0.9
Overall dimension	mm/in	350 x 350 x 28.2 / 13.7 x 13.7 x 1.1
Weight (without sleeve)	Kg/lbs	8 / 17.6

ENVIRONMENTAL

Operating temperature	°C/F°	0 to 50°C / +32 to +122°F
Storage temperature	°C/F°	-10 to 55°C / +14 to +131°F
Humidity	% R.H.	20 to 80
X-ray energy range	kV	Up to 225


(*) with Power/Com Cable accessory

SHERLOCK NDT SOFTWARE



Image editing	Wall thickness measurement
ADRC dynamic filter	SNR / SNRn
Local contrast enhancement	CNR / CNRn
Adjustable Teledyne filter	SRb / iSRb
Automatic & manual histogram equalization	Annotation / Highlight
Emboss	Mirroring / Rotation
Black & white	Auto IQI
Pseudo-colours	Pixel map edition
Grey level input value	Stitching tool
HDR	Greyscale feature

DRAWINGS

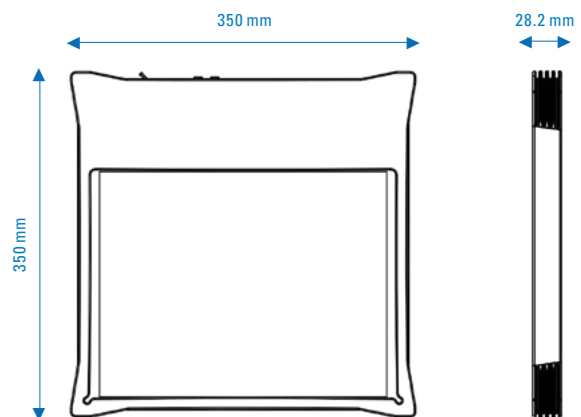

ACCESSORIES



LATERAL FEET

CDMX

Av. 517 No. 80, Col San Juan de Aragón 1a Sección, C.P. 07969, Alc. Gustavo A. Madero, México, CDMX.
 (55) 5751 3787
 (55) 5751 3767

Apodaca N.L.

Olimpia 1424 B Col. Nueva Lindavista, N.L. CP 67129
 (81) 13672397
 (81) 13574285



TELEDYNE ICM
 Everywhere you look™
 Part of the Teledyne Imaging Group