

 THE FUTURE IS NOW



GO-SCAN 4335

Portable Digital Radiography Detector



endsa.com



Ensayos No Destructivos S.A. de C.V.
EQUIPOS, ACCESORIOS Y CALIBRACIONES



TELEDYNE ICM
Everywhereyoulook™

Part of the Teledyne Imaging Group

Enter into the new world of digital inspection



BATTERY OPERATED



IP 67



WIRELESS OR CABLE




ASI TECHNOLOGY




PLUG & PLAY



RUGGEDIZED



STATE-OF-THE-ART IMAGE EDITING SOFTWARE



FULLY INTEGRATED

FEATURES


	Unit	GO-SCAN 4335
GENERAL		
Technology	-	aSi
Pixel pitch	µm	154
Active area	mm/in	433.7 x 354.8 / 16.9 x 13.8
Active resolution	pxl	2816 x 2304
BANDWIDTH		
Data interface	-	GigE & Wi-Fi
ADC conversion	bits	16
POWER CONSUMPTION		
Power consumption	W (standing/operating)	< 8 / 20
INTEGRATION		
Overall dimension	mm/in	464 x 388 x 188 / 18.26 x 15.27 x 7.4
Overall weight (without sleeve)	Kg/lbs	5.9 / 13
ENVIRONMENTAL		
Waterproof level	-	IP67
Drop test	m/in	1/39
Operating temperature	°C/F°	-20, 50°C / -4, +122°F
Storage temperature	°C/F°	-20, 60°C / -4, +140°F
Humidity	% R.H.	30 to 75
Life span	Gy/k rem	1000 / 100

SHERLOCK NDT SOFTWARE



Image editing	Smart measurement tool
ADRC dynamic filter	SNR
Local contrast enhancement	Greyscale feature
Teledyne filter	iSRb
Histogram equalization	Annotation / Highlight
Emboss	Mirroring / Rotation
Black & white	Auto IQI
Pseudo-colours	Pixel map edition

DRAWINGS

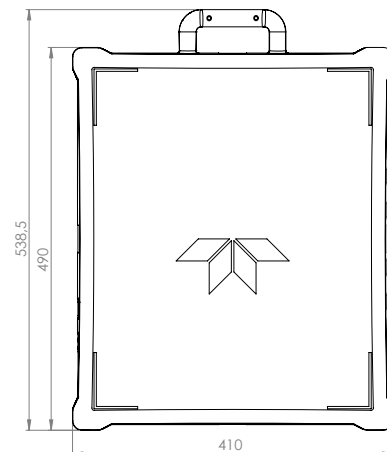

ACCESSORIES



FIXTURING BAR



LATERAL FEET



POWER/COM CABLE



CDMX

Av. 517 No. 80, Col San Juan de Aragón 1a Sección, C.P. 07969, Alc. Gustavo A. Madero, México, CDMX.

(55) 5751 3787
(55) 5751 3767

Apodaca N.L.

Olimpia 1424 B Col. Nueva Lindavista, N.L. CP 67129

(81) 13672397
(81) 13574285



TELEDYNE ICM
Everywhereyoulook™

Part of the Teledyne Imaging Group